CW1308 PVC CABLES

Technical information

Features:

- Internal telephone cable
- PVC sheath
- Designed for IDC terminations
- 0.50mm solid copper conductors
- Available with different numbers of pairs
- Available with white or black sheath

Technical Specifications

Conductor Diameter (mm)	Insulation Diameter (mm)	Max. Conductor Resistance Ω/km @ 20°C	Capacitance Unbalance pF/500m
0.50	0.95	97.8	500

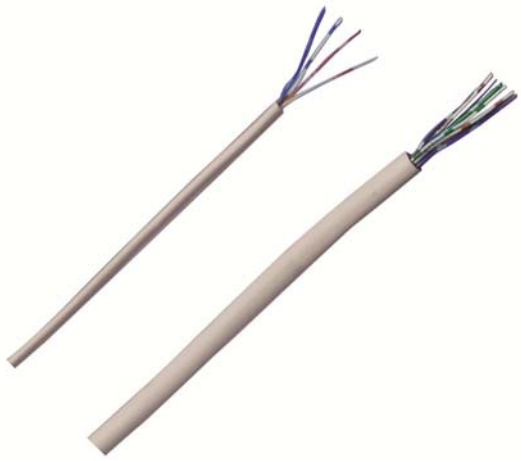

Part Numbers

Item	Description	No. of Pairs	CPR Euroclass	Reel Length (m)	Sheath Colour
770634	Cable CW1308 PVC	2	E_{ca}	100	White
992918	Cable CW1308 PVC	2	E_{ca}	200	White
801721	Cable CW1308 PVC	2	E_{ca}	200	Black
770636	Cable CW1308 PVC	3	E_{ca}	100	White
993287	Cable CW1308 PVC	3	E_{ca}	200	White
993275	Cable CW1308 PVC	3	E_{ca}	200	Black
770638	Cable CW1308 PVC	4	E_{ca}	100	White
992919	Cable CW1308 PVC	4	E_{ca}	200	White
770640	Cable CW1308 PVC	4	E_{ca}	200	Black
770641	Cable CW1308 PVC	6	E_{ca}	100	White
992757	Cable CW1308 PVC	6	E_{ca}	200	White
770643	Cable CW1308 PVC	6	E_{ca}	200	Black