



CAT5E UTP LOW PROFILE MODULES



Technical information

Features:


- ◆ Low profile design - only 20mm deep
- ◆ Cat5e compliant performance
- ◆ 568B wiring
- ◆ Top, bottom or rear cable entry
- ◆ Compatible with all Ultima Euro
- ◆ 110 or LSA punch down
- ◆ Cable strain relief facility
- ◆ Protected labelling facility
- ◆ 25 year Ultima System Warranty

Materials

Fascia & RJ45 Jack Housing	ABS UL94V-0
RJ45 Jack Contact	Material: Phosphor bronze, nickel plated. Finish: 50 micron gold plated on plug contact area
IDC Contact	Phosphor bronze, tin plated
Shutter	ABS UL94-HB

Performance

Insertion Force	20N max.
Retention Strength	7.7kg between Jack and Plug
Operating Temperature	-10°C to 60°C
Mating Cycles	750 cycles min.
IDC Wire Range	23-26 AWG stranded or solid wire. Compatible with 110 and LSA punch down tools

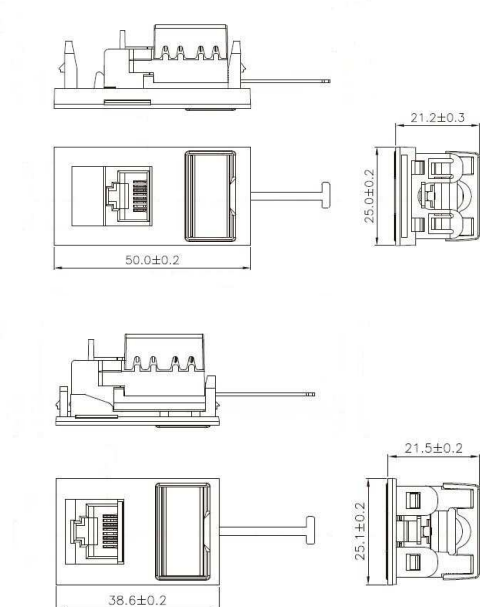

Part Number

Item	Description	Type	Style	Colour
771836	Low Profile Module	Unshielded	Euro	White
787117	Low Profile Module	Unshielded	Euro	Black
772412	Low Profile Module	Unshielded	LJ6c	White