

25
YEAR
WARRANTY

CAT6 SURFACE MOUNTED OUTLETS

Technical information

Ultima

Features:



- ◆ Surface mounted outlets remove need for a back box
- ◆ Cat6 compliant performance
- ◆ 568A and 568B wiring options
- ◆ PoE+ IEEE802.3at (30-33W) compliant
- ◆ Dual block 110/LSA punchdown
- ◆ Cable strain relief facility
- ◆ Supplied with mounting screws
- ◆ 25 year Ultima System Warranty

Materials

Housing	ABS, UL94V-0
RJ45 Jack Housing	PBT + Glass Fibre, UL94V-0
RJ45 Jack Contact	Phosphor bronze, nickel plated, finished with 50µ gold plating on plug contact area
IDC Housing	PC + Glass Fibre, UL94V-2
IDC Contact	Phosphor bronze, tin plated

Performance

Insertion Force	20N max.
Retention Strength	7.7kg between Jack and Plug
Operating Temperature	-10°C to 60°C
Mating Cycles	750 cycles min.
IDC Wire Range	22-26 AWG stranded or solid wire. Compatible with 110 and LSA punchdown tools

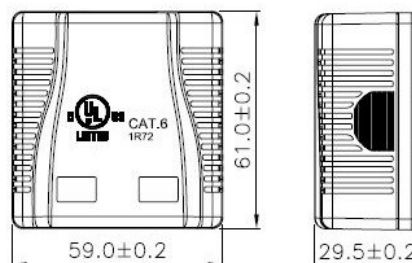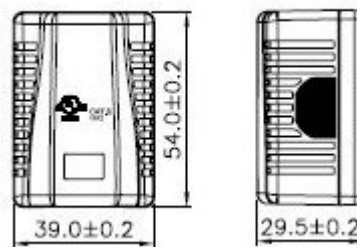

Part Numbers

Item	Description	Type	Ports	Colour
789793	Surface Mounted Outlet Cat6	Unshielded	1Port	White
789794	Surface Mounted Outlet Cat6	Unshielded	2Port	White