

# FIBRE PIGTAILS SC OM3



## Technical Information

### Features:


- ◆ Manufactured to the highest standards using 900m tight buffered fibre
- ◆ Terminated with LC fibre optic connectors at one end
- ◆ Opposite end left open ready for splicing
- ◆ Low Smoke Zero Halogen jacket
- ◆ Strain relief boot to protect fibre
- ◆ Batch tracking with unique pigtail ID
- ◆ Wide operating temperature range
- ◆ Cap fitted to protect connector end face

## Performance & Characteristics

Max Attenuation (dB) 1310nm	0.4
Max Attenuation (dB) 1383nm	0.4
Max Attenuation (dB) 1550nm	0.4
Insertion Loss (dB)	≤ 0.30
Temperature Range	-40°C to 75°C

## Standards

SC Connector Standard	IEC 61754-4
-----------------------	-------------

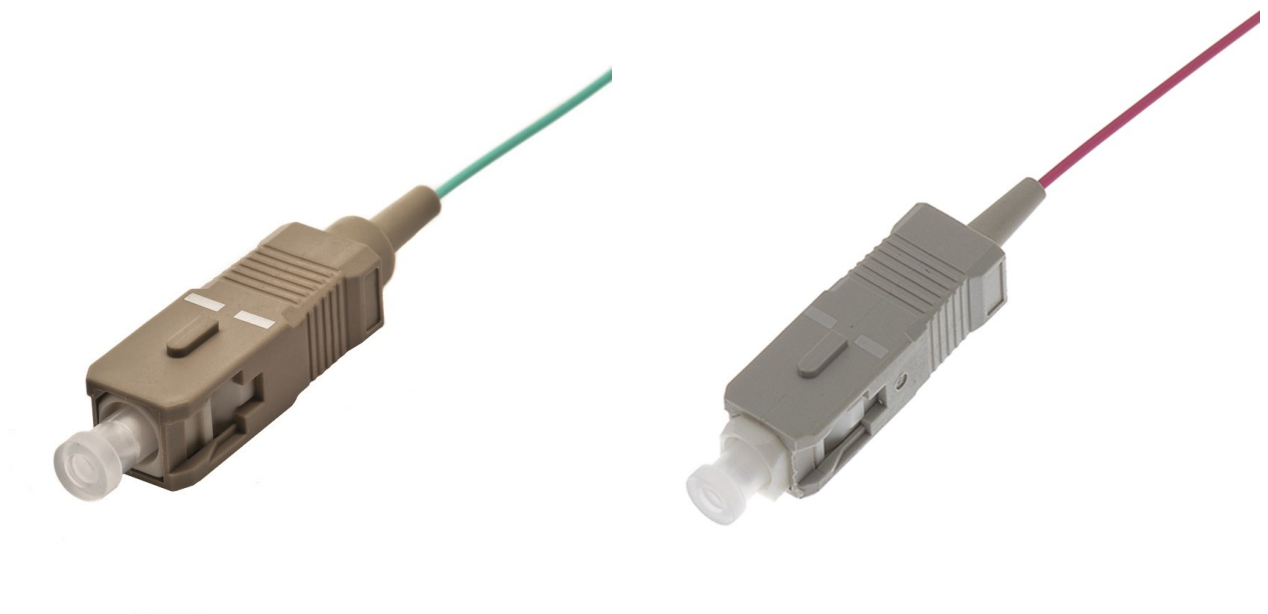

## Part Numbers

Item	Description	Connector	Mode	Length	Colour
777122	Fibre Pigtail	SC	OM3	1.0Mtr	Aqua
782386	Fibre Pigtail	SC	OM3	1.0Mtr	Violet
794941	Fibre Pigtail	SC	OM3	1.5Mtr	Aqua