

FIBRE PIGTAILS LC OM3

Technical Information



Features:


- ◆ Manufactured to the highest standards using 900m tight buffered fibre
- ◆ Terminated with LC fibre optic connectors at one end
- ◆ Opposite end left open ready for splicing
- ◆ Low Smoke Zero Halogen jacket
- ◆ Strain relief boot to protect fibre
- ◆ Batch tracking with unique pigtail ID
- ◆ Wide operating temperature range
- ◆ Fitted with cap to protect connector end face

Performance & Characteristics

Max Attenuation (dB) 850nm	3.5
Max Attenuation (dB) 1300nm	1.5
Bandwidth OFL (MHz x km) @ 850nm	1500
Bandwidth OFL (MHz x km) @ 1300nm	500
Insertion Loss (dB)	≤ 0.30
Temperature Range	-40°C to 75°C

Standards

LC Connector Standard	IEC 61754-20
-----------------------	--------------

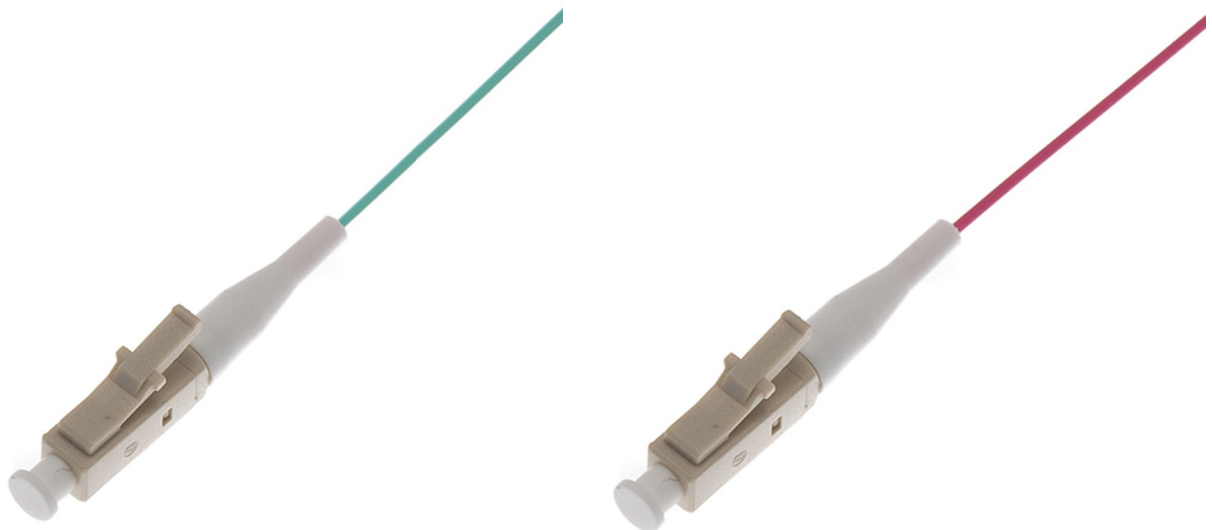

Part Numbers

Item	Description	Mode	Length	Colour
799831	Fibre Pigtail	OM3	1.0m	Aqua
794942	Fibre Pigtail	OM3	1.5m	Aqua
777124	Fibre Pigtail	OM3	1.0m	Violet
782387	Fibre Pigtail	OM3	2.0m	Aqua