

## Technical Information

### Features:


- ◆ Manufactured to the highest standards using 900m tight buffered fibre
- ◆ Terminated with LC fibre optic connectors at one end
- ◆ Opposite end left open ready for splicing
- ◆ Low Smoke Zero Halogen jacket
- ◆ Strain relief boot to protect fibre
- ◆ Batch tracking with unique pigtail ID
- ◆ Wide operating temperature range
- ◆ Fitted with cap to protect connector end face

## Performance & Characteristics

Max Attenuation (dB) 1300nm	0.4
Max Attenuation (dB) 1550nm	0.4
Insertion Loss (dB)	≤ 0.30
Temperature Range	-40°C to 75°C

## Standards

LC Connector Standard	IEC 61754-20
-----------------------	--------------

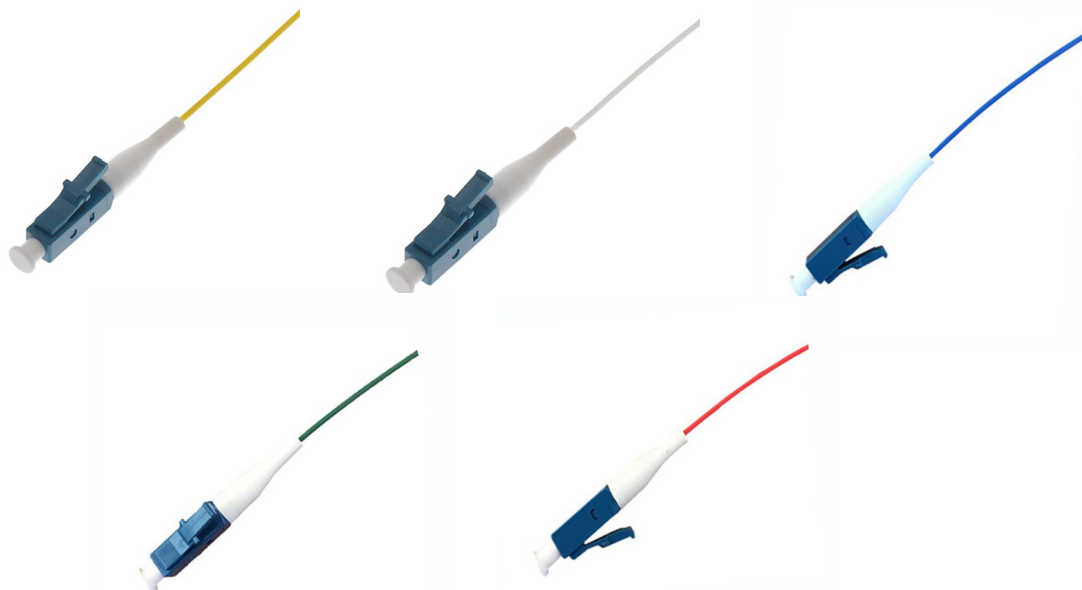

## Part Numbers

Item	Description	Mode	Length	Colour
775572	Fibre Pigtail LC	OS2	1.0Mtr	Yellow
800272	Fibre Pigtail LC	OS2	1.5Mtr	White
794777	Fibre Pigtail LC	OS2	1.5Mtr	Yellow
819050	Fibre Pigtail LC	OS2	2.0Mtr	Yellow
819047	Fibre Pigtail LC	OS2	2.0Mtr	Blue
819048	Fibre Pigtail LC	OS2	2.0Mtr	Green
819049	Fibre Pigtail LC	OS2	2.0Mtr	Red