

SC-SC OM3 DUPLEX PATCH LEADS



Technical Information

Features:

- ◆ Provides moveable links between sections of permanently installed horizontal cable
- ◆ Suitable for use in computer rooms, data centres and work areas
- ◆ Low Smoke Zero Halogen Jacket
- ◆ Tight Buffered Fibre with aramid yarn
- ◆ Full test certificate provided with each lead
- ◆ High quality build and performance
- ◆ Strain relief boots to protect fibre
- ◆ Dust caps provided to keep the connector end face clean
- ◆ Marked transmit and receive legs
- ◆ RoHS compliant construction

Performance & Characteristics


Max Attenuation (dB) 850nm	3.5
Max Attenuation (dB) 1300nm	1.5
Bandwidth OFL (MHz x km) @ 850nm	1,500
Bandwidth OFL (MHz x km) @ 1300nm	500
Insertion Loss (dB)	≤ 0.20
Return Loss	≥ 35
Temperature Range	-40°C to 75°C

Standards

SC Connector Standard	IEC 61754-4
-----------------------	-------------

Physicals

Diameter (mm)	2.0
Housing Colour	Beige

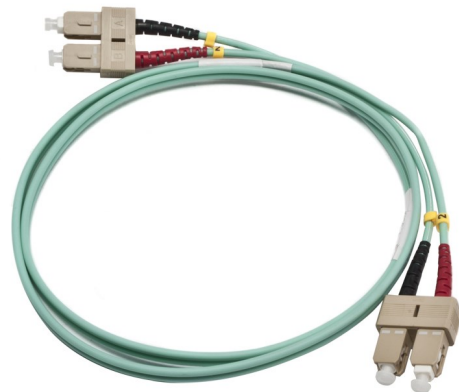

Part Numbers

	Item	Description	Mode	Length	Colour
OM3 50/125µm	777074	Fibre Patch Lead SC-SC	MM	1Mtr	Aqua
	777075	Fibre Patch Lead SC-SC	MM	2Mtr	Aqua
	777076	Fibre Patch Lead SC-SC	MM	3Mtr	Aqua
	777077	Fibre Patch Lead SC-SC	MM	5Mtr	Aqua
	800311	Fibre Patch Lead SC-SC	MM	7Mtr	Aqua
	777078	Fibre Patch Lead SC-SC	MM	10Mtr	Aqua
	782339	Fibre Patch Lead SC-SC	MM	15Mtr	Aqua
	782338	Fibre Patch Lead SC-SC	MM	20Mtr	Aqua