

SC-SC OS2 DUPLEX PATCH LEADS

Technical Information



Ultima fibre optic patch leads are manufactured to the highest standards and supplied individually bagged with their own test certificate. The transmit and receive leg of each duplex lead is clearly marked to allow for a quick install.

Features:

- ◆ Provide moveable links between sections of permanently installed horizontal cable
- ◆ Suitable for use in computer rooms, data centres and work areas
- ◆ Low Smoke Zero Halogen Jacket
- ◆ Tight Buffered Fibre with aramid yarn
- ◆ Full test certificate provided with each lead
- ◆ High quality build and performance
- ◆ Strain relief boots to protect fibre
- ◆ Dust caps provided to keep the connector end face clean
- ◆ Marked transmit and receive legs
- ◆ RoHS compliant construction

Performance & Characteristics


Max Attenuation (dB) 1310nm	0.4
Max Attenuation (dB) 1550nm	0.3
Max Chromatic Dispersion (ps/nm x km) @ 1310nm	3.0
Max Chromatic Dispersion (ps/nm x km) @ 1550nm	18.0
Temperature Range	-40°C to 75°C

Physicals

Diameter (mm)	2.0
Housing Colour	Blue

Standards

SC Connector Standard	IEC 61754-4
-----------------------	-------------

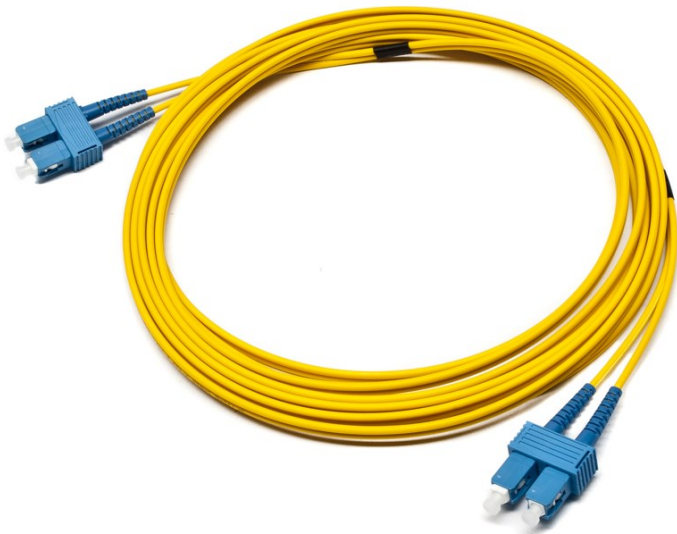

SC-SC OS2 DUPLEX PATCH LEADS

Technical Information



Part Numbers

	Item	Description	Mode	Length	Colour
OS2 9/125µm	797918	Fibre Patch Lead SC-SC	SM	0.5Mtr	Yellow
	779750	Fibre Patch Lead SC-SC	SM	1Mtr	Yellow
	798497	Fibre Patch Lead SC-SC	SM	1.5Mtr	Yellow
	779751	Fibre Patch Lead SC-SC	SM	2Mtr	Yellow
	779752	Fibre Patch Lead SC-SC	SM	3Mtr	Yellow
	779753	Fibre Patch Lead SC-SC	SM	5Mtr	Yellow
	793757	Fibre Patch Lead SC-SC	SM	7Mtr	Yellow
	779754	Fibre Patch Lead SC-SC	SM	10Mtr	Yellow
	782202	Fibre Patch Lead SC-SC	SM	15Mtr	Yellow
	782293	Fibre Patch Lead SC-SC	SM	20Mtr	Yellow
	789641	Fibre Patch Lead SC-SC	SM	25Mtr	Yellow
	789642	Fibre Patch Lead SC-SC	SM	30Mtr	Yellow
	791871	Fibre Patch Lead SC-SC	SM	35Mtr	Yellow
	800302	Fibre Patch Lead SC-SC	SM	40Mtr	Yellow