



# CAT5E UTP LOW PROFILE MODULES



## Technical information

### Features:


- ◆ Low profile design - only 20mm deep
- ◆ Cat5e compliant performance
- ◆ 568B wiring
- ◆ Top, bottom or rear cable entry
- ◆ Compatible with all Ultima Euro
- ◆ 110 or LSA punch down
- ◆ Cable strain relief facility
- ◆ Protected labelling facility
- ◆ 25 year Ultima System Warranty

### Materials

<b>Fascia &amp; RJ45 Jack Housing</b>	ABS UL94V-0
<b>RJ45 Jack Contact</b>	Material: Phosphor bronze, nickel plated. Finish: 50 micron gold plated on plug contact area
<b>IDC Contact</b>	Phosphor bronze, tin plated
<b>Shutter</b>	ABS UL94-HB

### Performance

<b>Insertion Force</b>	20N max.
<b>Retention Strength</b>	7.7kg between Jack and Plug
<b>Operating Temperature</b>	-10°C to 60°C
<b>Mating Cycles</b>	750 cycles min.
<b>IDC Wire Range</b>	23-26 AWG stranded or solid wire. Compatible with 110 and LSA punch down tools

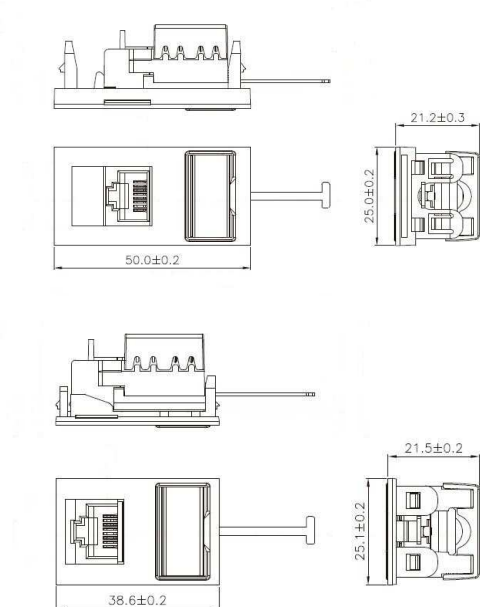

### Part Number

Item	Description	Type	Style	Colour
771836	Low Profile Module	Unshielded	Euro	White
787117	Low Profile Module	Unshielded	Euro	Black
772412	Low Profile Module	Unshielded	LJ6c	White